

Boxet is a family of a small high-power recessed luminaries with a minimalist and clean effect. The Unified Glare Rate (UGR) is less than 13 thanks to its reflector that makes almost imperceptible that it is on and does not dazzle. This makes it ideal for projects that require high visual comfort. Available in modules of one, two, five and ten; It has a modular fixed or tilting version

# Boxet



|                             |                                       |
|-----------------------------|---------------------------------------|
| Index protection<br>IP20    | Colour temp.<br>2700K / 3000K / 4000K |
| UGR<br><13                  | Technology<br>LED                     |
| Flicker<br>Flicker free <5% | Guarantee<br>5 years                  |
| Step McAdam<br>3-SDCM       | Class<br>II                           |
| Driver<br>Included          | Voltage<br>230V                       |
| CRI<br>> 90                 | Bluetooth<br>>20m                     |
| Lifetime<br>65.000h L80B10  | Tilting<br>30° (19205- /19210-)       |




The BOXET family is made up of small, high-power recessed luminaires that allow us to achieve a minimalist and clean effect. The UGR or unified glare index is less than 13 thanks to its reflector, making it almost imperceptible that it is on and does not dazzle at all. This makes it ideal for projects that require high visual comfort. Available in modules of one, two, five and ten; it has a fixed modular version or tilting.

Architectural collection

Boxet




Apartment in Sabadell by Exitprojectes Arquitectos.  
Photography by Eugeni Aguilo

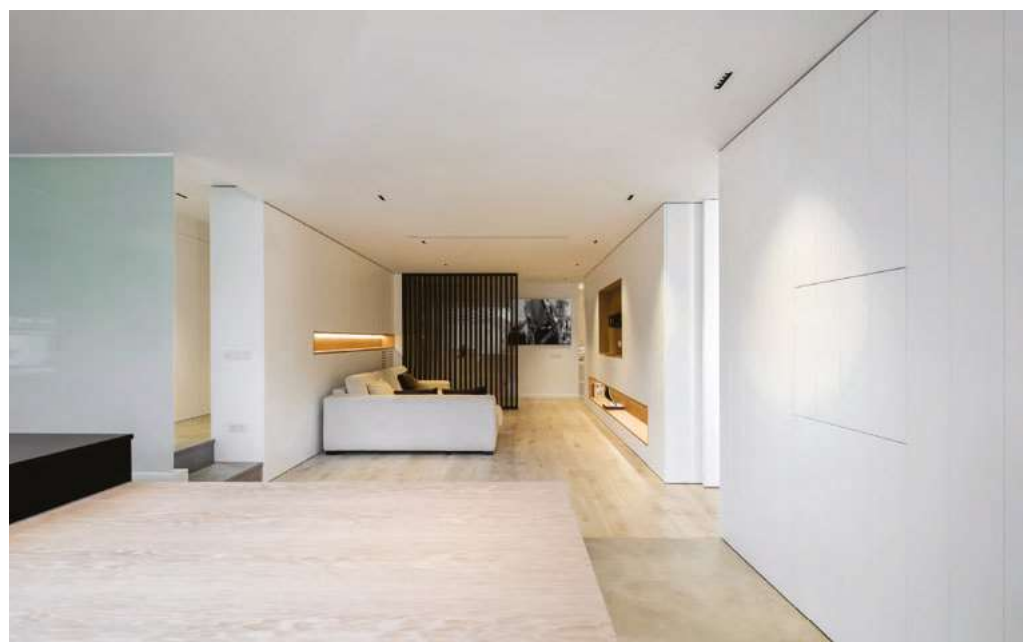




19101-




Cut-out 38x38mm

19102-




Cut-out 67x38mm

19105-

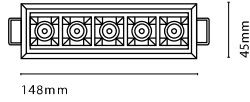

Cut-out 141x38mm

19110-

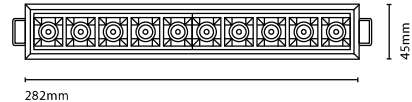


Cut-out 275x38mm

|        |   | Colour/Reflector | CRI/Temp.    | Angle | Led             | Dimming        | Emergency      |
|--------|---|------------------|--------------|-------|-----------------|----------------|----------------|
| 19101- | 0 | White / Black    | H 90 / 2700K | 1 12° | 0 210 lm / 2W   | On-Off         |                |
|        | 1 | Black            | E 90 / 3000K | 3 34° |                 | N Dali no-push |                |
|        | W | White / White    | F 90 / 4000K | 4 48° |                 |                |                |
| 19102- | 0 | White / Black    | H 90 / 2700K | 1 12° | 0 420 lm / 4W   | On-Off         |                |
|        | 1 | Black            | E 90 / 3000K | 3 34° |                 | N Dali no-push |                |
|        | W | White / White    | F 90 / 4000K | 4 48° |                 |                |                |
| 19105- | 0 | White / Black    | H 90 / 2700K | 1 12° | 1 1050 lm / 10W | - On-Off       | - No Emergency |
|        | 1 | Black            | E 90 / 3000K | 3 34° |                 | D Dali push    | EM Kit 1h      |
|        | W | White / White    | F 90 / 4000K | 4 48° |                 | B Bluetooth    |                |
|        |   |                  |              |       |                 | M Matter       |                |
| 19110- | 0 | White / Black    | H 90 / 2700K | 1 12° | 2 2100 lm / 20W | - On-Off       | - No Emergency |
|        | 1 | Black            | E 90 / 3000K | 3 34° |                 | D Dali push    | EM Kit 1h      |
|        | W | White / White    | F 90 / 4000K | 4 48° |                 | N Dali no-push |                |
|        |   |                  |              |       |                 | B Bluetooth    |                |
|        |   |                  |              |       | M Matter        |                |                |


• Customization options available under request:  
Special colors (minimum units)



19205-  
Boxet Adjustable 10 W

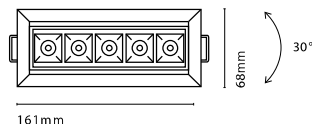


161mm




Cut-out 154x55mm

19210-  
Boxet Adjustable 20 W

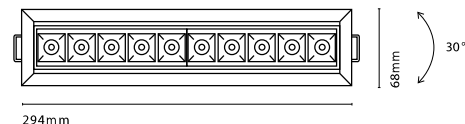

294mm



Cut-out 288x55mm

|        | Colour          | CRI/Temp.    | Angle | Led             | Dimming        | Emergency      |
|--------|-----------------|--------------|-------|-----------------|----------------|----------------|
| 19205- | 0 White         | H 90 / 2700K | 1 12° | 1 1050 lm / 10W | - On-Off       | - No Emergency |
|        | 1 Black         | E 90 / 3000K | 3 34° |                 | D Dali push    | EM Kit 1h      |
|        | W White / White | F 90 / 4000K | 4 48° |                 | B Bluetooth    |                |
|        |                 |              |       |                 | M Matter       |                |
|        | Colour          | CRI/Temp.    | Angle | Led             | Dimming        | Emergency      |
| 19210- | 0 White         | H 90 / 2700K | 1 12° | 2 2100 lm / 20W | - On-Off       | - No Emergency |
|        | 1 Black         | E 90 / 3000K | 3 34° |                 | D Dali push    | EM Kit 1h      |
|        | W White / White | F 90 / 4000K | 4 48° |                 | N Dali no-push |                |
|        |                 |              |       |                 | B Bluetooth    |                |
|        |                 |              |       | M Matter        |                |                |

• Customization options available under request:  
Special colors (minimum units)