



# Tolva

Tolva helps us to complete those projects that require high visual comfort with the latest LED technology. It has a design that stands out for its complete integration into the space, four different sizes and is available in all RAL color chart. For more elegant projects, we also have an electrolytic coating for finishes in gold, copper and graphite

In addition, Tolva now incorporates dim to warm technology that allows not only the regulation of the intensity of the light but also that the color temperature of the same varies from a warm white (3000K) to an ultra-warm white, simulating the light of one candle (1800K). Other news are that the height of the luminaire has been reduced to fit any ceiling and is available in IP65.

Index protection  
IP20 / IP65

Colour temp.  
2700K / 3000K / 4000K

Flicker  
Flicker free <7%

⦿ Dim to warm  
(1800K-3000K)

Step McAdam  
3-SDCM

Technology  
LED

Driver  
Included

Guarantee  
5 years

CRI  
> 90

Class  
II

Lifetime  
65.000h L80B10

Voltage  
230V

UGR  
<19  
(00401- / 00402- / 00411-)


Bluetooth  
>20m



Project by Exit Projectes  
Photography by Entre dos aguas


# Tolva L

00401-  
Tolva L SYM

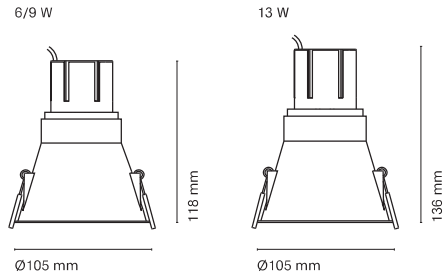

Cut-out 100mm

00402-  
Tolva L ASYM

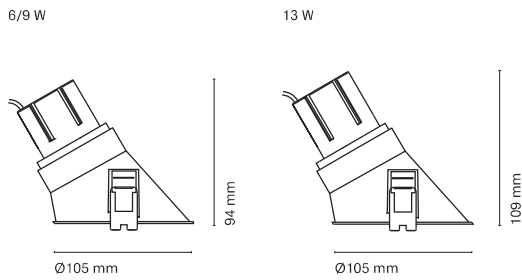

Cut-out 100mm





|        | Colour     | CRI/Temp.      | Angle | Led             | Dimming      | Index Protection | Emergency      |
|--------|------------|----------------|-------|-----------------|--------------|------------------|----------------|
| 00401- | 0 White    | H 90 / 2700K   | 2 20° | 0 780 lm / 6W** | - On-Off     | - IP20           | - No emergency |
| 00402- | 1 Black    | E 90 / 3000K   | 4 40° | 1 1070 lm / 9W  | D* Dali push | P IP65           | EM Kit 1h      |
|        | A Copper   | F 90 / 4000K   | 6 60° | 2 1400 lm / 13W | R* Edge Cut  |                  |                |
|        | D Gold     | D* 90 / 18-30K |       |                 | B Bluetooth  |                  |                |
|        | G Graphite |                |       |                 | M Matter     |                  |                |

\* Dim to warm (1800K - 3000K): Only available with 6W dimmable version.

\*\* Dim to warm 635lm / 6W

## Accessories

15045-1 Honeycomb


|        | Colour       | 00401-  | 00402-  |
|--------|--------------|---|---|
| 00401- | 0GU White    |  |  |
| 00402- | 1GU Black    |   |   |
|        | AGU Copper   |   |   |
|        | DGU Gold     |   |   |
|        | GGU Graphite |   |   |

Cut-out 100 mm      Ø105 mm      Ø105 mm

• Customization options available under request:  
Special colors (minimum units)

## Tolva M

00411-  
Tolva M Adjustable  
6/9 W

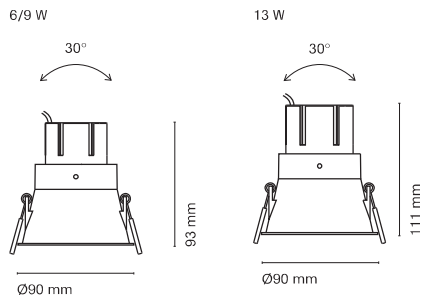

Cut-out 85mm




|        | Colour     | CRI/Temp.      | Angle | Led             | Dimming      | Index Protection | Emergency      |
|--------|------------|----------------|-------|-----------------|--------------|------------------|----------------|
| 00411- | 0 White    | H 90 / 2700K   | 2 20° | 0 780 lm / 6W** | - On-Off     | - IP20           | - No Emergency |
|        | 1 Black    | E 90 / 3000K   | 4 40° | 1 1070 lm / 9W  | D* Dali push | P IP65           | EM Kit 1h      |
|        | A Copper   | F 90 / 4000K   | 6 60° | 2 1400 lm / 13W | R* Edge Cut  |                  |                |
|        | D Gold     | D* 90 / 18-30K |       |                 | B Bluetooth  |                  |                |
|        | G Graphite |                |       |                 | M Matter     |                  |                |

\* Dim to warm (1800K - 3000K): Only available with 6W dimmable version.

\*\* Dim to warm 635lm / 6W

| 00411- | Colour   |
|--------|----------|
| 0GU    | White    |
| 1GU    | Black    |
| AGU    | Copper   |
| DGU    | Gold     |
| GGU    | Graphite |



Cut-out 85 mm

### Accessories


|         |           |
|---------|-----------|
| 15045-1 | Honeycomb |
|---------|-----------|

• Customization options available under request:  
Special colors (minimum units)

## Tolva S


00293-  
Tolva S

6/9 W



62 mm

13 W



80 mm



Ø60 mm



Ø60 mm






Cut-out 57 mm



|        | Colour     | CRI/Temp.      | Angle | Led             | Dimming      | Index Protection | Emergency      |
|--------|------------|----------------|-------|-----------------|--------------|------------------|----------------|
| 00293- | 0 White    | H 90 / 2700K   | 2 20° | 0 780 lm / 6W** | - On-Off     | - IP20           | - No Emergency |
|        | 1 Black    | E 90 / 3000K   | 4 40° | 1 1070 lm / 9W  | D* Dali push | P IP65           | EM Kit 1h      |
|        | A Copper   | F 90 / 4000K   | 6 60° | 2 1400 lm / 13W | R* Edge Cut  |                  |                |
|        | D Gold     | D* 90 / 18-30K |       |                 | B Bluetooth  |                  |                |
|        | G Graphite |                |       |                 | M Matter     |                  |                |

\* Dim to warm (1800K - 3000K): Only available with 6W dimmable version.

\*\* Dim to warm 635lm / 6W

| 00293- | Colour   | 00293-  |
|--------|----------|---|
| 0GU    | White    |  |
| 1GU    | Black    |  |
| AGU    | Copper   |  |
| DGU    | Gold     |  |
| GGU    | Graphite |  |

Cut-out 57 mm      Ø60 mm

### Accessories

15045-1      Honeycomb

• Customization options available under request:  
Special colors (minimum units)

# Tolva Mini



Index protection  
IP44 (IP20 superior)

UGR  
< 13

Flicker  
Flicker free

Step McAdam  
3-SDCM

Driver  
Included

CRI  
> 90

Lifetime  
65.000h L80B10

Colour temp.  
2700K / 3000K / 4000K


Technology  
LED

Guarantee  
5 years

Class  
II

Voltage  
230V



00150N-



Ø39 mm

Cut-out 35mm

00151-



Ø55 mm

|         | Colour  | CRI/Temp.    | Angle | Led          | Dimming        |
|---------|---------|--------------|-------|--------------|----------------|
| 00150N- | 0 White | H 90 / 2700K | 2 20° | 0 560lm / 6W | - On-Off       |
| 00151-  | 1 Black | E 90 / 3000K | 3 36° |              | N Dali no-push |
|         |         | F 90 / 4000K |       |              |                |